FOR ACCURATE SPRAYING

YOUR PARTNER

evolution 30 LTC⁶

evolution 30 LTC ⁶

YOUR PARTNER FOR ACCURATE SPRAYING







AVAILABLE ACCESSORIES




Telescopic lance




Rectangular / conical hood




Extension



Double nozzle



Flexible double nozzle



Extendible double nozzle



Air-induced nozzle

Keep always your sprayer ready with the Maintenance Kits. Extend the life of your tool with original MATABI spare parts. Get the maximum performance and effectiveness of the treatment with your sprayer.

Tel.: +34 943 786 000

spraying@goizper.com



www.matabi.com



Application of treatments:

- Herbicides and Fungicides.

- Products of natural origin...

- Anti-moss applications.

- Liquid fertilisers.















30-litre spray trolley for small holding, allotment and garden. Equipped with pumps and nozzles for typical phytosanitary applications (weedkillers, insecticides and fungicides), moss killers, liquid fertilisers, anti-moss applications, liquid fertilisers, products of natural origin, etc. Easy to use and convenient to transport. Comes with Electronic Control for consistent spraying.




2 WORKING POSITIONS




A simple **control system** to select the most suitable operating mode for each type of application.

18 V Li-Ion BATTERY



Battery protected, easy-to-access and replaceable.


*Charger included

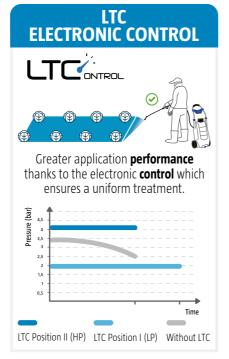

TECHNICAL INFORMATION											
NET WEIGHT	RATED CAPACITY	MAXIMUM PRESSURE	BATTERY (li-lon)	MAXIMUM CHARGING TIME	AUTONOMY PER BATTERY CHARGE	CODE					
7,5 kg 16.5 lb	30 L 7.9 US gal	5,5 bar 80 psi	18 V 2,6 Ah	4h	100-300 L 40-79 US gal	84343					

NOZZLES INCLUDED

This device includes by default 2 nozzles for insecticide treatments and 2 nozzles for herbicide treatments with the aim of increasing the effectiveness of the treatments. Please follow the recommendation in the following table to select the appropriate nozzle and working position to adapt the spray to the specific requirements of each treatment and obtain the best results. It reduces drift in herbicide treatments and guarantees fine droplet size and greater coverage in insecticide/fungicide treatments.

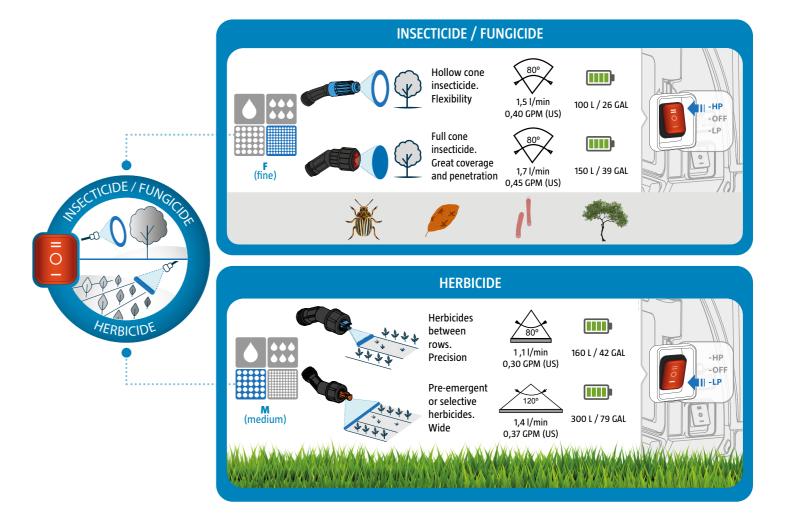

SPRAY PARAMETERS PER NOZZLE FLOW

The following table summarises the range of suitable nozzles for the Evolution LTCs model.

POSITION I (LP)				NOZZLE	POSITION II (HP)			
AUTONOMY by battery load		PRESSURE		COLOUR Standard	PRESSURE		AUTONOMY by battery load	
Gallons	Litres	PSI	bar	ISO 10.625	bar	PSI	Litres	Gallons
37	140	54	3,75	0,8 lpm	-	-	-	-
40	150	50	3,5	1 lpm	-	-	-	-
42	160	36	2,5	1,2 lpm	4,5	65	100	26
60	230	29	2	1,6 lpm	3,5	50	150	40
79	300	22	1,5	2 lpm	2,75	40	180	47
-	-	-	-	3,2 lpm	1,5	22	400	105